

Universal APU2 Pumps

AUTOMOTIVE PAINT SERIES



For more than half a century, Waukesha Cherry-Burrell has been a leader in the design, manufacturing and application of external circumferential, piston (ECP) style, rotary positive displacement pumps.

Waukesha Cherry-Burrell PD pumps are in thousands of challenging chemical and industrial applications. Universal APU2 Series are now in service in multiple plants, automotive and motorcycle manufacturers.

SPX FLOW, Inc. (NYSE:FLOW) is a leading manufacturer of innovative flow technologies, many of which help define the industry standard in the market segments they serve. From its headquarters in Charlotte, North Carolina, it operates a sales and support network, centers of manufacturing excellence, and advanced engineering facilities, throughout the world. Its cutting-edge flow components and process equipment portfolio includes a wide range of pumps, valves, heat exchangers, mixers, homogenizers, separators, filters, UHT, and drying technology that meet many application needs. Its expert engineering capability also makes it a premium supplier of customized solutions and complete, turn-key packages to meet the most exacting of installation demands.

Incorporating many leading brands, SPX FLOW has a long history of serving the food and beverage, power and energy, and industrial market sectors. Its designs and engineered solutions help customers drive efficiency and productivity, increase quality and reliability, and meet the latest regulatory demands. In-depth understanding of applications and processes, state-of-the-art Innovation Centers, and advanced pilot/testing technology further assist in optimizing processes and reducing timescales to reliably meet production targets.

To learn more about SPX FLOW capabilities, its latest technology innovations and complete service offerings, please visit www.spxflow.com.

New levels of performance. Reduced paint shop and mix room costs.

Users of Waukesha Cherry-Burrell PD pumps benefit from decades of continuing product improvement. Steady advances in design, metallurgy and fabrication techniques have yielded progressively higher levels of performance and service life.

The UNIVERSAL APU2 SERIES of pumps is the latest expression of this tradition. They combine 3-way mounting versatility with new features that extend pump life and improve performance.

FEATURES AND BENEFITS

- 316 stainless steel pump body and cover.
- Exclusive, non-galling Waukesha "88" alloy rotors standard; permits running at tighter clearances and pumping a wide range of viscosities.
- Rotor/shaft connection sealed from product zone.
- Mechanical seals standard. Single or flushed double.
- Up to 500 psi (34.5 bar) pressure capability.
- Rotor nut designed for extended service without loosening.
- No bearings in product zone.
- Larger diameter 17-4 PH shafts in seal area for greater strength and stiffness. Helps eliminate vibration; extends seal life.
- Heavy duty bearing frame.
- Double tapered roller bearings on all models. Contribute further to precise rotor position and longer seal life.
- Silicone free grease lubed bearings for positive lubrication to all bearings over entire speed, temperature and pressure range.
- Body retaining screws for maintaining mechanical seal contact during inspection.
- O-ring on inner seal, seals on clean surface as seal moves due to wear.
- Bearing isolators keep product out of gearcase and bearings.

INSTALLATION FLEXIBILITY

- Bi-directional flow. Rotors, locked with unique washers and torqued nuts, rotate securely in either direction.
- Interchangeable installation dimensions with Universal 1 AP Series pumps.
- Versatile 3-Way mounting of gear case, including vertical alignment of ports.
- Upper or lower drive shaft position.

Typical product applications



Paints

- Water borne paints
- Solvent borne paints
- Clear coats
- Metallic flake paints
- Base coats



Optional Coatings for Abrasive Applications

- Armolloy® Coating
- Composite Diamond Coating (CDC)

BENEFITS OF UNIVERSAL APU2 SERIES


- Protects water-borne shear sensitive paints.
- Pigments are not separated, which can change viscosity and cause color shifts.
- Aluminum and mica metallic flakes are not damaged, which result in deep rich paint luster, and shiny finish.
- Color matching between body and components is not a problem.
- Substantial energy cost savings compared to turbine and piston pumps.
- Constant flow regardless of system pressure changes, results in high film quality and thickness.
- Pressure surges eliminated.
- Minimal heat added to product.
- Pumps are energy efficient, and easily cleaned, maintained, and repaired.

REQUIREMENTS	WAUKESHA	TURBINE	PISTON
Eliminates surge suppression	YES	YES	YES
Constant flow regardless of system pressure changes	YES	YES	YES
Minimal heat input	YES	NO	NO
Energy efficient	YES	NO	NO
Easily repaired	YES	NO	NO
Easily cleaned	YES	NO	NO
Easily maintained	YES	YES	NO
Prevent metallic flake degradation	YES	NO	YES



Performance and long life through engineering.

High pressure capability, up to 500 psi (34.5 bar), for more demanding jobs.


Metal rotor: Waukesha "88" non-galling alloy, for close running clearance.

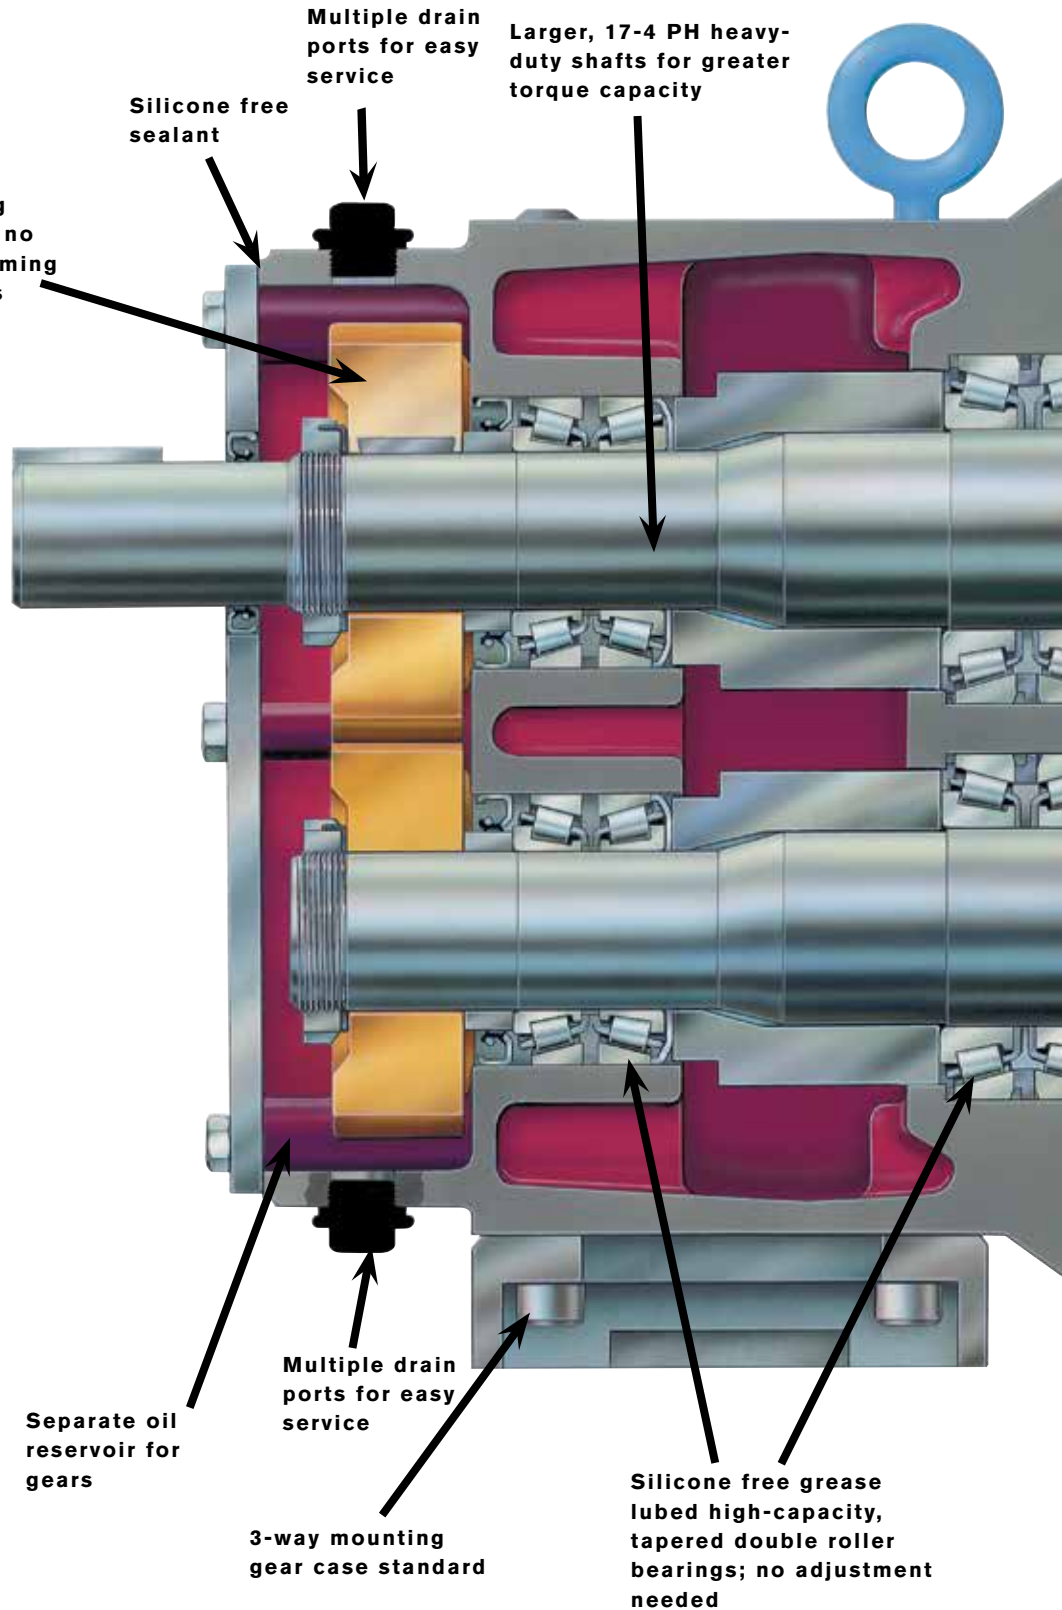

Seal Options

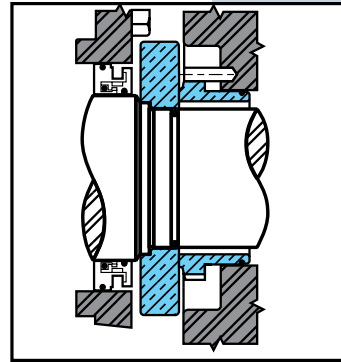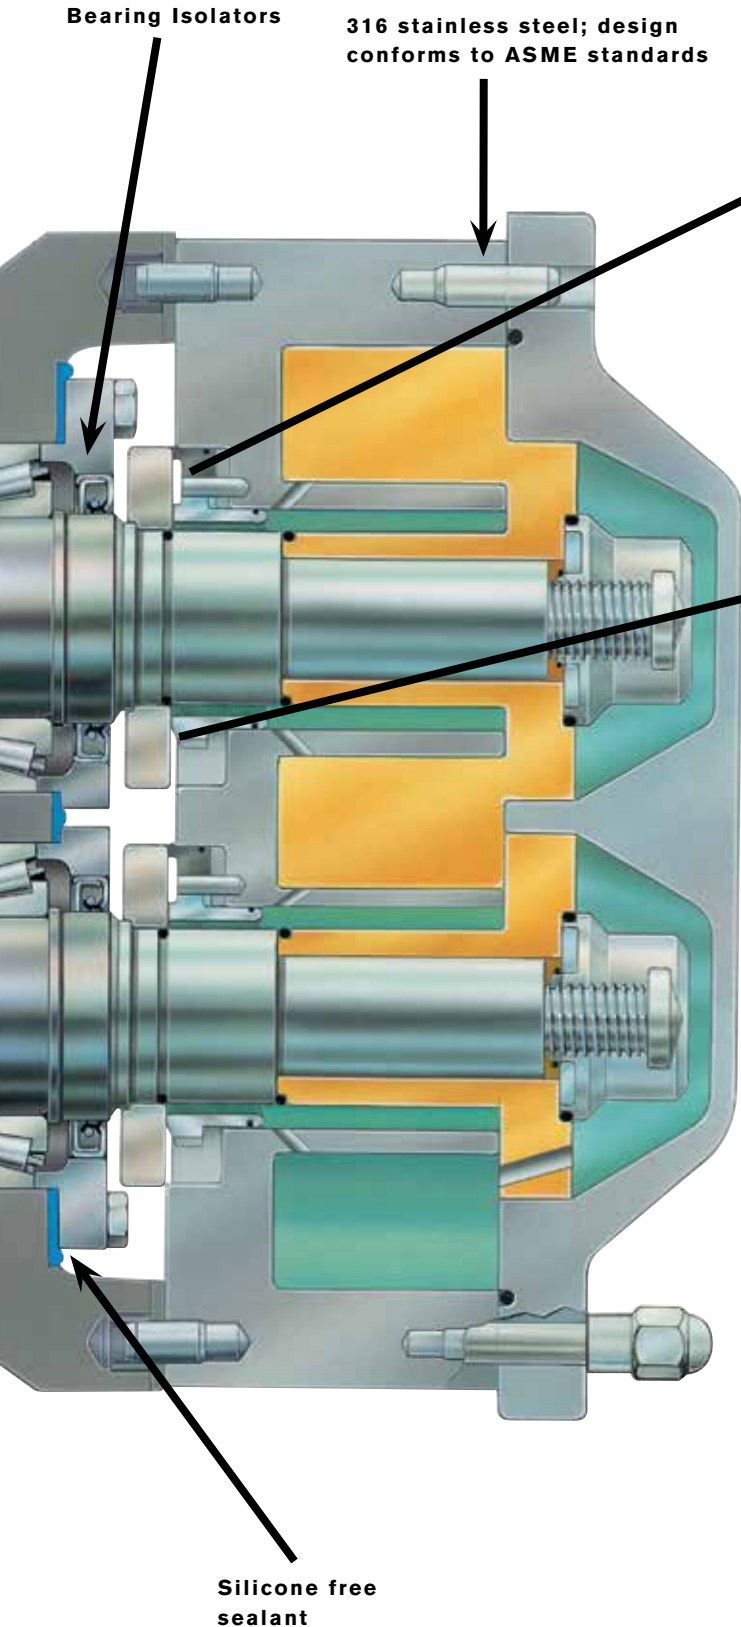

Single Mechanical Seal*
(Standard)
Ceramic to ceramic faces.

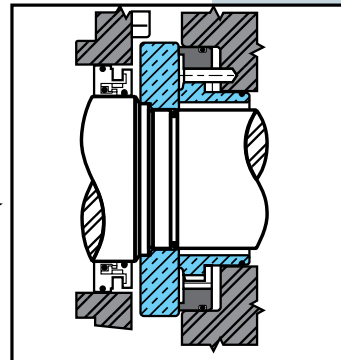

Double Concentric Mechanical Seal*
(Optional)
Used with quench fluid to cool, lubricate, flush away residue. Best arrangement for difficult to seal paints and clear coats.

Elastomers for "O" rings:

- FFKM
- PTFE Encapsulated

*Mechanical seal material:

Single Seal:

- Ceramic vs. Ceramic

Double Seal:

- Ceramic vs. Ceramic inner
- Ceramic vs. Carbon outer

See Through Sight Glass for Quick Oil Level Check



Drain Plugs for Easy Service

PRODUCT SPECIFICATIONS



Universal APU2 Pump

MODEL	DISPLACEMENT PER REVOLUTION	NORMAL CAPACITY* TO	INLET/OUTLET	OPTIONAL INLET/OUTLET	PRESSURE RANGE UP TO	MAXIMUM RPM*	TEMP RANGE
AP 015-U2	0.0142 gal (0.054 L)	11 gal/min (2.5 m ³ /h)	1 1/2" (38 mm)	-----	250 psi (17.2 bar)	800	(-)40F°/C to 300°F (149°C)
AP 018-U2	0.029 gal (0.110 L)	20 gal/min (4.5 m ³ /h)	1 1/2" (38 mm)	2" (51 mm)	200 psi (13.8 bar)	700	
AP 030-U2	0.060 gal (0.227 L)	36 gal/min (8.2 m ³ /h)	1 1/2" (38 mm)	2" (51 mm)	250 psi (17.2 bar)	600	
AP 040-U2	0.076 gal (0.288 L)	46 gal/min (10.4 m ³ /h)	2" (51 mm)	-----	150 psi (10.5 bar)	600	
AP 045-U2	0.098 gal (0.371 L)	58 gal/min (13.2 m ³ /h)	2" (51 mm)	-----	450 psi (31.0 bar)	600	
AP 060-U2	0.153 gal (0.579 L)	90 gal/min (20.4 m ³ /h.)	2 1/2" (64 mm)	3" (76 mm)	300 psi (20.7 bar)	600	
AP 130-U2	0.253 gal (0.958 L)	150 gal/min (34.1 m ³ /h)	3" (76 mm)	-----	200 psi (13.8 bar)	600	
AP 180-U2	0.380 gal (1.438 L)	230 gal/min (52.2 m ³ /h)	3" (76 mm)	-----	450 psi (31.0 bar)	600	
AP 210-U2	0.502 gal (0.1.900 L)	300 gal/min (68.1 m ³ /h)	4" (102 mm)	-----	500 psi (34.5 bar)	600	
AP 220-U2	0.521 gal (0.1.972 L)	310 gal/min (70.4 m ³ /h)	4" (102 mm)	-----	300 psi (20.7 bar)	600	
AP 320-U2	0.752 gal (0.2.847 L)	450 gal/min (102 m ³ /h)	6" (152 mm)	-----	300 psi (20.7 bar)	600	

* Listed capacity and maximum rpm for intermittent duty only.

Consult Waukesha Cherry-Burrell technical services for recommendations on your pumping requirements.


CLOSE COUPLED TRU-FIT® PUMP MOUNTED ON EPOXY-PAINTED OPEN BASE

Features:

- No shaft alignment necessary. No coupling guard required.
- Special base design enhances cleanability.
- Reduces overall length of complete unit by an average of 20-25%.
- Average of 20-25 gear ratios available per horsepower.
- Separate oil sump for gear reducer and timing gears.

Options:

- 304 SS unpolished plate base.
- 304 SS polished plate base.
- NEMA or IEC frames available. Right angle reducer also available for additional space savings.
- 1/2 through 60 horsepower drive options available.
- Horizontal or vertical porting.

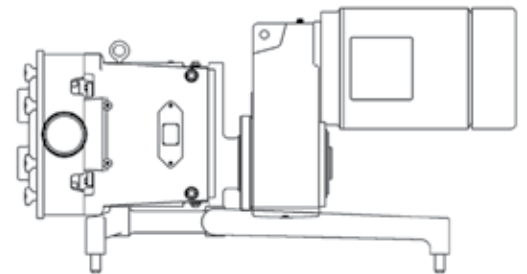

Time-tested Waukesha Cherry-Burrell rotary pump; external circumferential piston (ECP) operating principle





In the Waukesha Cherry-Burrell design, arc-shaped “pistons” (rotor wings) travel in annular-shaped cylinders machined in the pump body; the resulting long sealing path reduces slippage and produces a smooth flow of product without destructive pulses or pressure peaks and without valves or complex parts.

EXCLUSIVE WAUKESHA CHERRY-BURRELL DESIGN FEATURES

For Low Viscosity Fluids, rotors, made of exclusive Waukesha “88” alloy, can be run with close clearance to the 316 stainless steel fluid head, without galling or seizing should inadvertent pressure surges cause contact. The close clearances combined with the rotor geometry, which gives a long sealing path between the pump inlet and outlet, means low slip operation. As a result, you achieve: high volumetric efficiency and good flow control.

For High Viscosity Fluids, the large fluid cavities of the rotors plus the large, easy entry anti-cavitation ports allow efficient pumping of high viscosity fluids, slurries or even liquids with large chunks or particles.

For Non-Lubricating and Abrasive Fluids, the unique Waukesha Cherry-Burrell design has no bearings in the fluid being pumped, no sliding or rolling contact and no rotor-to-rotor contact. This produces MAXIMUM SERVICE LIFE even under severe operating conditions.

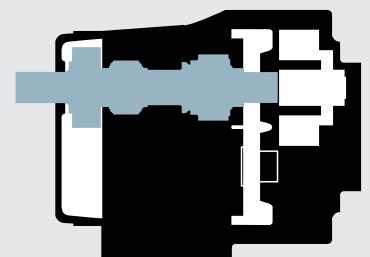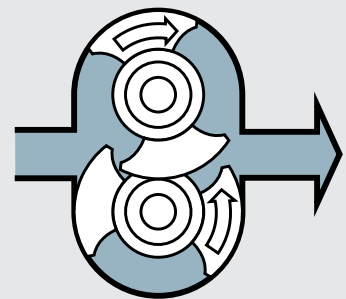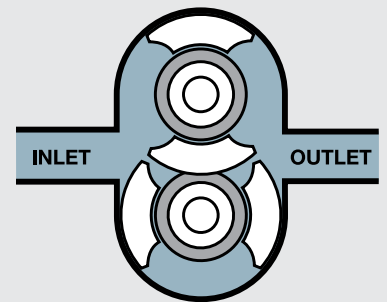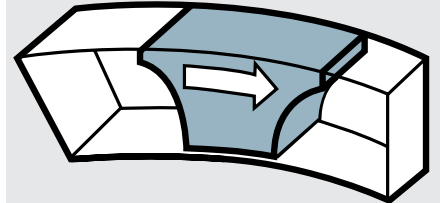

Universal APU2 Pumps


AUTOMOTIVE PAINT SERIES

SPXFLOW

PRODUCT DIMENSIONS

PUMP MODEL		CP	I	L	O	PORT SIZE	U +.000 -.001	2X
AP 015-U2	IN	11.71	7.66	9.61	4.21	1-1/2"	.875	6.97
	mm	297	194	244	107	----	22.23	177
AP 018-U2	IN	12.37	7.66	10.48	4.21	1-1/2"	.875	6.97
	mm	314	194	266	107	----	22.23	177
AP 030-U2	IN	14.49	8.83	11.61	5.21	1-1/2"	1.250	8.50
	mm	368	224	295	132	----	31.75	216
AP 040-U2	IN	14.87	8.83	11.77	5.21	2"	1.25	8.62
	mm	378	224	305	132	----	31.75	219
AP 045-U2	IN	18.59	10.99	14.86	7.31	2"	1.625	10.75
	mm	472	279	377	186	----	41.28	273
AP 060-U2	IN	19.14	10.99	15.14	7.31	2-1/2"	1.625	10.75
	mm	486	279	385	186	----	41.28	273
AP 130-U2	IN	20.15	10.99	15.77	7.31	3"	1.625	10.75
	mm	512	279	401	186	----	41.28	273
AP 180-U2	IN	23.26	14.80	18.25	9.38	3"	2.000	13.06
	mm	591	376	464	238	----	50.80	332
AP 210-U2	IN	27.08	17.80	21.24	10.38	4"	2.375	14.73
	mm	688	452	539	264	----	60.45	374
AP 220-U2	IN	24.00	14.80	18.49	9.38	4"	2.000	13.25
	mm	610	376	470	238	----	50.80	337
AP 320-U2	IN	27.66	17.80	21.63	10.38	6 150# FLG	2.375	16.000
	mm	703	452	549	264	----	60.45	406

NOTE: Dimension "2X" applies for "S"-Clamp on Models 015 through 220. DIN and other connections available. Dimension "2X" applies for 6" (152 mm) 150 lb. RF Flange on Model 320.

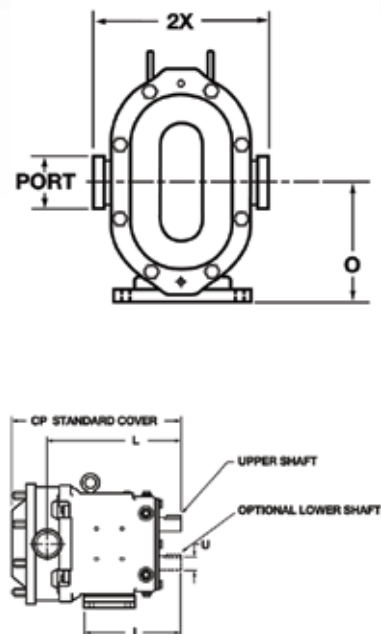

Based in Charlotte, North Carolina, SPX FLOW, Inc. (NYSE: FLOW) is a multi-industry manufacturing leader. For more information, please visit www.spxflow.com

SPX FLOW

611 Sugar Creek Road

Delavan, WI 53115

P: (262) 728-1900 or (800) 252-5200

F: (262) 728-4904 or (800) 252-5012

E: wcb@spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green "s" and "x" are trademarks of SPX FLOW, Inc.

ISSUED 07/2016 FH-1737

COPYRIGHT © 2016 SPX FLOW, Inc.